



# INSIZE

SOLVE MEASUREMENT PROBLEMS



## Great Lakes Carbide Supply Inc.

Serving all of Canada from Ontario & Alberta

519-391-0732 info@greatlakescarbidesupply.com

### DIGITAL CALIPERS (STANDARD TYPE)

INSPECTION CERTIFICATE DATA OUTPUT

- Non waterproof
- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: wireless transmitter part no. 7315-25 (receiver is needed), accessory set for digital calipers (part no. 6144, only for range 0-6" and 0-8"), depth base attachment (part no. 6140)



1108-150

POPULAR MODEL

Part No.	Range	Accuracy	Price (CAD)
1108-150 *	0-6"/0-150mm	±.0010"	66.25
1108-200 *	0-8"/0-200mm	±.0015"	91.39
1108-300 *	0-12"/0-300mm	±.0015"	159.90

\*Supplied with manufacturer inspection certificate

### TELESCOPING GAUGE SET

- 6 gauges per set
- For quick measurement of inside diameter of holes and width of slots
- Satin chrome finish



4206-1

Part No.	Range	Gauges included	Price (CAD)
4206-1	5/16-6"	5/16-1/2", 1/2-3/4", 3/4-1-1/4", 1-1/4-2-1/8", 2-1/8-3-1/2", 3-1/2-6"	58.37

### OUTSIDE MICROMETERS

- Graduation: .0001"
- Carbide measuring faces
- Supplied with setting standards (except 0-1")

INSPECTION CERTIFICATE

POPULAR MODEL



3203-2A

#### Ratchet stop type

Part No.	Range	Accuracy	Price (CAD)
3203-1A *	0-1"	±.0001"	43.36
3203-2A *	1-2"	±.0001"	48.86


#### Micrometer set (ratchet stop type)

Part No.	Range	Micrometers included	Packaging	Price (CAD)
3203-33A *	0-3"	3203-1A, 3203-2A, 3203-3A	blow mould case	147.01
3203-66A *	0-6"	3203-1A, 3203-2A, 3203-3A, 3203-4A, 3203-5A, 3203-6A	blow mould case	336.17
3203-1212A *	0-12"	3203-1A, 3203-2A, 3203-3A, 3203-4A, 3203-5A, 3203-6A, 3203-7A, 3203-8A, 3203-9A, 3203-10A, 3203-11A, 3203-12A	aluminum box	1276.62

\*Supplied with manufacturer inspection certificate

### COMBINATION SQUARE SET (CLOSE TYPE PROTRACTOR)

- Center head (made of cast iron): to locate center of cylinder with diameter (d): 1.181" DIA-3.937" DIA Accuracy: ±.006"
- Protractor head (made of cast iron): set the blade at desired angle to an edge of a workpiece, and can be used to measure angles range: 0-180°, accuracy: ±20min.
- Square head (made of cast iron): set the blade at 90° or 45° to an edge of a workpiece accuracy: ±8min for 90° square, ±10min for 45° square
- Blade (made of stainless steel)
- Optional accessory: rigid ruler (part no. 7113)

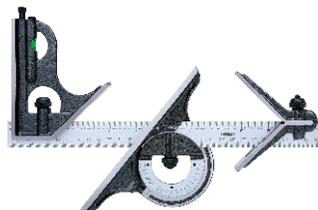


2278-180

Part No.	Remark	Blade range	Blade graduation	Price (CAD)
2278-180E	4-piece set	12"	1/8" and 1/16" on front face, 1/32" and 1/64" on back face	197.94

### DIAL CALIPERS

INSPECTION CERTIFICATE SHOCK PROOF

- Dial indicator graduation .001"
- Shockproof dial indicator
- Made of stainless steel

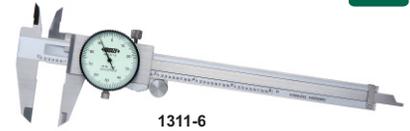

1311-6

Part No.	Range	Accuracy	Price (CAD)
1311-6 *	0-6"	±.0015"	91.75
1311-8 *	0-8"	±.0020"	114.18
1311-12 *	0-12"	±.0020"	178.03

\*Supplied with manufacturer inspection certificate

### DIGITAL HEIGHT GAUGE WITH DRIVING WHEEL

INSPECTION CERTIFICATE DATA OUTPUT

- Non waterproof
- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm, preset +, preset -, ABS/INC
- Automatic power off, move the digital unit to turn on power
- Carbide tipped scriber
- Made of stainless steel (except the base)
- Battery CR2032, data output
- Supplied with dust cover
- With dial test indicator holder
- Optional accessory: wireless transmitter part no. 7315-22 (receiver is needed), clamp for protractors (part no. 2372-CLAMP)



1156-300

POPULAR MODEL

Part No.	Range	Accuracy	Price (CAD)
1156-300	0-12"/0-300mm	±.0015"	704.11

### MAGNETIC STAND

- Applicable holding stem: 3/8" DIA, Ø8mm, Ø4mm
- For digital/dial indicators and dial test indicators

POPULAR MODEL



6200-60

Part No.	Magnetic force	Remark	Price (CAD)
6200-60	132lbf	without fine adjustment	40.61

### DIAL INDICATOR

INSPECTION CERTIFICATE

- Graduation: .001"
- Range/rev: .1"
- Cap: can lift
- Meet ASME B89.1.10M-2001
- With lug back
- Maximum measuring force .405lbf
- Supplied with limit pointers and bezel clamp
- Optional accessory: backs, contact points



2307-1

Part No.	Range	Accuracy		Maximum measuring force	Dial reading	Price (CAD)
		First 2.5rev	Overall			
2307-1	1"	±.001"	±.002"	.405lbf	0-100	39.94

### DIAL TEST INDICATOR

INSPECTION CERTIFICATE JEWELLED BEARING

- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: inch 5/32" DIA and 3/8" DIA
- Optional accessory: styli



2380-31

POPULAR MODEL

Part No.	Range	Graduation	Accuracy	Hysteresis	Dial reading	Price (CAD)
2380-35	.03"	.0005"	±.0005"	.00016"	0-15-0	94.79